
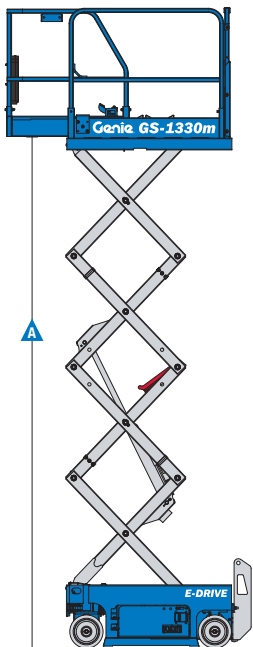



# Self-Propelled Scissor Lifts

## GS™ -1330m

### Specifications



| Models   | GS-1330m    |        |
|--|-------------|--------|
| Measurements   | US          | Metric |
| Working height maximum <sup>1</sup>                            | 18 ft 10 in | 5.9 m  |
| <b>A</b> Platform height, maximum                              | 12 ft 10 in | 3.9 m  |
| <b>B</b> Platform height stowed                                | 2 ft 11 in  | 0.90 m |
| <b>C</b> Platform length - outside                             | 4 ft 2 in   | 1.26 m |
| extended   | 5 ft 8 in   | 1.72 m |
| Slide-out platform extension deck                              | 1.5 ft      | 0.46 m |
| <b>D</b> Platform width - outside                              | 26.5 in     | 0.67 m |
| Guardrail height   | 3 ft 7 in   | 1.1 m  |
| Toeboard height  | 6 in        | 0.15 m |
| <b>A</b> Height-stowed: fixed rails                            | 6 ft 3.6 in | 1.92 m |
| folding rails  | 6 ft 7.5 in | 2.02 m |
| rails folded   | 5 ft 6 in   | 1.68 m |
| <b>F</b> Length-stowed   | 4 ft 8 in   | 1.41 m |
| Length-stowed extended   | 6 ft 2 in   | 1.87 m |
| <b>G</b> Width   | 30.5 in     | 0.78 m |
| <b>H</b> Wheelbase   | 3 ft 3 in   | 0.98 m |
| <b>A</b> Ground clearance-center with pothole guards retracted | 2.4 in      | 6 cm   |
| - with pothole guards deployed                                 | 0.63 in     | 2 cm   |

### Productivity

|  |                           |                |
|--|---------------------------|----------------|
| Maximum platform occupancy (in/out) <sup>2</sup>             | 2                         | -              |
| Maximum platform capacity with extension deck retracted      | 500 lbs                   | 227 kg         |
| Maximum extension deck capacity with extension deck extended | 200 lbs                   | 91 kg          |
| Drive height   | Full height               |                |
| Drive speed - stowed   | 2.5 mph                   | 4.0 km/h       |
| - raised   | 0.5 mph                   | 0.8 km/h       |
| Gradeability - stowed <sup>3</sup>                           | 25%/14°                   |                |
| Turning radius - inside                                      | 15.7 in                   | 40 cm          |
| - outside  | 5 ft 1 in                 | 1.55 m         |
| Raise / lower speed  | 20 / 24 sec               |                |
| Controls   | Proportional              |                |
| Drive  | dual rear wheel, electric |                |
| Brakes   | dual rear wheel, electric |                |
| Tires - solid non-marking                                    | 10 x 3 in                 | 25.4 x 7.62 cm |

### Power

|                           |                                 |       |
|---------------------------|---------------------------------|-------|
| Power source              | 24 V (two 12 V 85 Ah batteries) |       |
| Hydraulic system capacity | 1.05 gal                        | 4.0 L |

### Weight<sup>4</sup> / Floor Loading<sup>5</sup>

|           |           |        |
|-----------|-----------|--------|
| ANSI, CSA | 1,950 lbs | 885 kg |
|-----------|-----------|--------|

Standards Compliance ANSI A92.20, CSA B354.6, CE EN280, AS 1418.10

<sup>1</sup> The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

<sup>2</sup> Indoor use only for the GS-1330m

<sup>3</sup> Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

<sup>4</sup> Weight will vary depending on options and/or country standards.

<sup>5</sup> Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.

### Features

#### Standard Features

##### Measurements

##### GS-1330m

- 18 ft 10 in (5.9 m) working height
- Up to 500 lbs (227 kg) lift capacity

##### Productivity

- 50 x 26.5 in (1.26 x 0.67 m) steel platform
- Fixed rail with half-height swing gate
- 1.5 ft (.46 m) extension deck
- Drive at full height
- Dual rear wheel electric drive
- SmartLink™ - proportional lift and drive
- Universal 20 amp smart charger
- Rear recessed charger receptacle
- Up to 25% gradeability
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel electric brakes
- Electric brake release
- Swing-out component trays
- Solid non-marking tires
- Pothole guards
- Dual flashing LED beacons
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter
- Motion alarm

##### Power

- 24 V DC (two 12V 85 Ah batteries)

#### Options & Accessories

##### Productivity Options

- Folding rails with half-height swing gate
- Fixed rails with saloon doors
- Platform control guard
- Air line to platform
- Automotive horn

##### Power Options

- Power inverter (110 V/60 Hz)
- AGM maintenance-free batteries



#### Genie United States

6464 185th Ave. NE  
Redmond, WA 98052  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By:

